



# COMPACT STAND-ON TRACK LOADER

# ATL1000

ArcPath ATL 1000, with a compact 36" width and 9" wide tracks, is designed for efficient performance in tight working spaces. Powered by a Kubota engine and loaded with top-tier components for reliable performance, it features pressure relief Rapid Couplers, offering smooth and efficient hydraulic connections for a wide range of attachments.

## Hydraulic Parking Brake

### Convenience Features:

Cup holder, 12V power supply and USB port

## LCD Screen

With full-color display for easy monitoring

## Kubota Engine D1105

With a heavy flywheel design, adding inertia to prevent slowdown under heavy loads

## Dual Hydraulic Pumps

## Dual Hydraulic Coupler

Allows the operator to connect multi-function attachments, providing a more cost-effective solution compare to traditional electric controlled attachments

### Easy Maintenance:

The design features a wide-opening front hood, rear access for control valve servicing, and easily removable side panels for efficient maintenance

## Rapid Coupler:

3-port auxiliary couplers with pressure relief function for easy hydraulic connections

Supports more than 15 Attachments Including Drill Auger, Power Rake, Pallet Forks, Grapples, Trencher, Stump Grinder, Jackhammer, Tooth Bucket, High Capacity Bucket, Snow Push Blade, Snow Blower, Concrete Mixer, and more.



**36" Wide**  
fits through backyard gates and other tight spaces



**9" Tracks** for reduced ground pressure, offering improved traction and enhanced performance on various terrains



**Bucket Pin Height: 87"**



**Floating Boom** allows the boom to independently adjust to the ground's surface, effectively grading uneven terrain



# Compact Equipment Zero Compromise



Large Mounting Plate



CII Universal Mounting Plate

## Engine

Engine Power	24.4 hp (18.2 kW) @ 3000 rpm
Engine Type	Kubota D1105 Plus
Displacement	67.13 cu.in (1.1 L )

## Performance


Rated Operating Capacity	1000 lb (453.5 kg)
Tipping Load	2866 lb (1300 kg)
Operating Weight	3086 lb (1400 kg)
Ground Pressure	3.6 psi (24.8 kpa)
Auxiliary Flow	13.5 gpm (51 L/min)
Travel Speed	4.4 mph (7.1 km/h)
Fuel Capacity	9 gal (34 L)

## Dimension

Length With Bucket	113.5 in (2885 mm)
Width	36 in (914mm)
Height	56.9 in (1446 mm)
Height to Bucket Hinge Pin	87 in (2212 mm)
Track Length on Ground	42.7 in (1085 mm)
Reach @ Max Height	23 in (584 mm)
Ground Clearance	8.38 in (213 mm)



Trencher

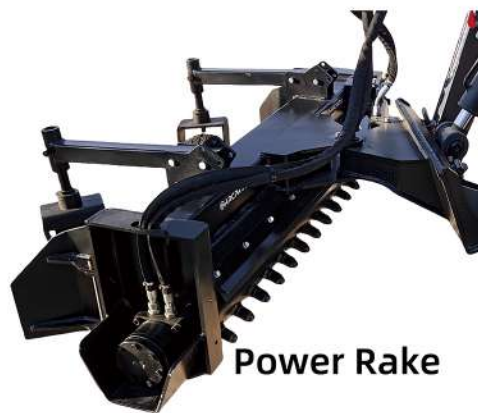

Power Rake



Post Auger



Pallet fork



Grapple



Brush Mower

